



LSP3

THE THIRD GENERATION OF GEARED OFFSET HEADS



reddot award 2015
honourable mention

PURSUING DEVELOPMENTS, DEVELOPING SUCCESSES.

The **first** LÜBBERING
geared offset head

LÜBBERING standard programme
Generation 1

LÜBBERING standard programme
Generation 2

LÜBBERING standard programme
Generation 3

1984

1989

1999

2014



LÜBBERING standard programme – Generation 3

ACCURATE

Process reliability through higher levels of accuracy

COMPACT

Improved ergonomics through compact design

MODULAR

Higher flexibility through modular construction


EFFICIENT

Cost savings from easy maintenance

AGENDA

- **L.SP3 system**
 - L.SP3 access
 - L.SP3 access inline
 - L.SP3 access straight
 - L.SP3 touch
 - L.SP3 angle
 - L.SP3 angle HD
 - L.SP3 angle touch
 - L.SP3 x-connect
 - L.SP3 connect
- All advantages at a glance
- Fastening solutions for the automotive industry
- Product overview
- Configurator

STRUCTURE AND COMPONENTS OF THE NEW FASTENING SYSTEM

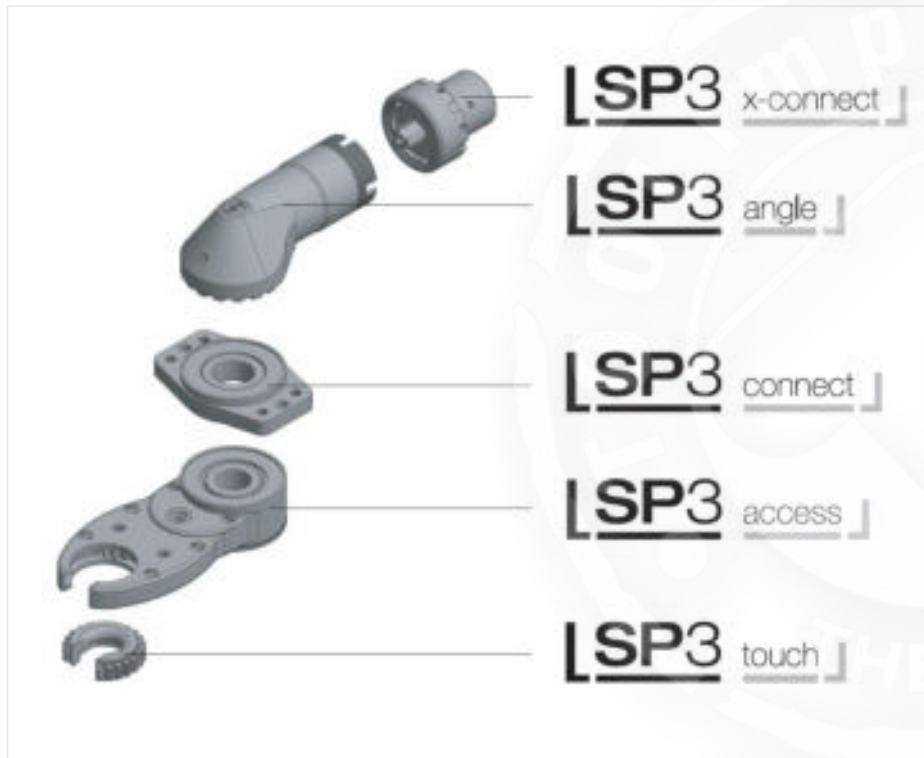

- ▶ Individually combinable
- ▶ Configured for every application
- ▶ Optional additional components
- ▶ Wide range of variations possible thanks to modular system
- ▶ High availability and easy maintenance

AGENDA

- L.SP3 system
 - L.SP3 access**
 - L.SP3 access inline
 - L.SP3 access straight
 - L.SP3 touch
 - L.SP3 angle
 - L.SP3 angle HD
 - L.SP3 angle touch
 - L.SP3 x-connect
 - L.SP3 connect
- All advantages at a glance
- Fastening solutions for the automotive industry
- Product overview
- Configurator

STANDARD GEARED OFFSET HEAD | CLOSED DESIGN



Module	12	22	35	55	85	140	190	250
Maximum input torque [Nm]	12	22	35	55	85	140	190	250
Maximum output torque [Nm]								
2-stage	10	18	29	46	71	116	158	207
3-stage	9	17	27	43	66	109	148	195
4-stage	9	16	26	40	62	102	139	182
6-stage	8	15	24	37	-	-	-	-

STANDARD GEARED OFFSET HEAD | CLOSED DESIGN

- ▶ **Modular system**
 - 8 different modules
 - Each module has 2, 3, 4 or 6 stage geared offset heads
- ▶ **Guaranteed accuracy of $\pm 6\%$**
- ▶ Even **the smallest designs** transmit **high torques**
- ▶ Uniform housing for **all types of interfaces**
- ▶ Compact design: **optimized ergonomics**
- ▶ Highly modular
- ▶ Uniform housing for the **upward and downward** installation direction for output socket gears with holder

STANDARD GEARED OFFSET HEAD | OPEN DESIGN



Module	12	22	35	55	85	140	190	250
Maximum input torque [Nm]	-	22	35	55	85	140	190	-
Maximum output torque [Nm]								
2-stage	-	17	27	43	66	109	148	-
3-stage	-	16	26	40	62	102	139	-
4-stage	-	15	24	37	58	95	129	-


STANDARD GEARED OFFSET HEAD | OPEN DESIGN

- ▶ **Modular system**
 - 6 different modules
 - Each module has 2, 3 or 4 stage geared offset heads
- ▶ **Guaranteed accuracy of $\pm 15\%$**
- ▶ Even **the smallest designs** transmit **high torques**
- ▶ Uniform housing for **all types of interfaces**
- ▶ Compact design: **optimized ergonomics**
- ▶ Highly modular
- ▶ Uniform housing for direction of rotation **left and right**

AGENDA

- L.SP3 system
 - L.SP3 access
 - L.SP3 access inline**
 - L.SP3 access straight
 - L.SP3 touch
 - L.SP3 angle
 - L.SP3 angle HD
 - L.SP3 angle touch
 - L.SP3 x-connect
 - L.SP3 connect
- All advantages at a glance
- Fastening solutions for the automotive industry
- Product overview
- Configurator

INLINE GEARED OFFSET HEAD | CLOSED + OPEN DESIGN

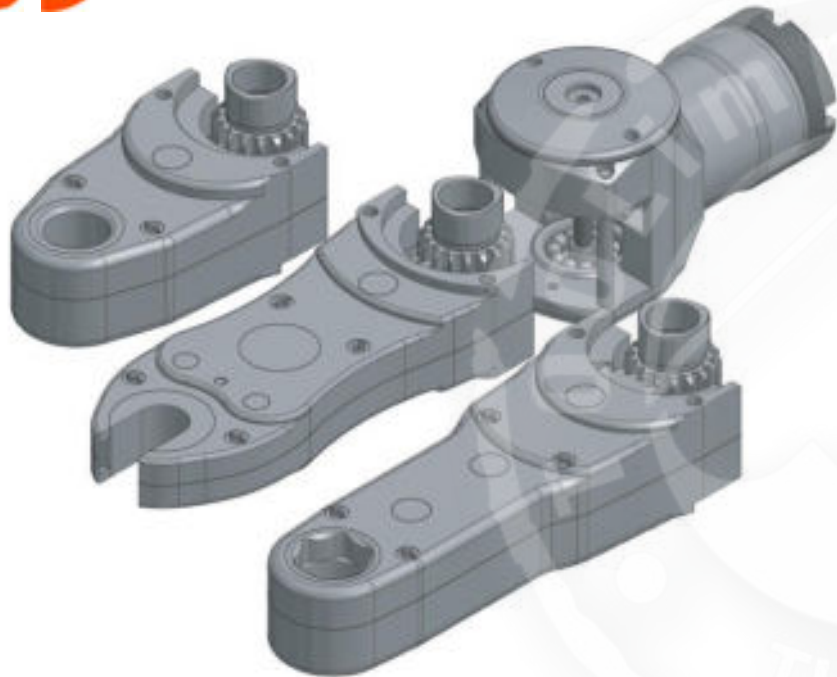

- ▶ Separable housing
- ▶ Simple assembly
- ▶ Wide range of variations
- ▶ Open design of the geared offset head:
 - Uniform housing for rotation direction **left/right**
- ▶ Closed design of the geared offset head:
 - Uniform housing for the **upward/downward** installation direction for offset heads with counter units

i The key feature of **L.SP3 access inline** is that **the drive modules are interchangeable**. They come in three lengths which can be used as needed.

AGENDA

- L.SP3 system
 - L.SP3 access
 - L.SP3 access inline
 - L.SP3 access straight**
 - L.SP3 touch
 - L.SP3 angle
 - L.SP3 angle HD
 - L.SP3 angle touch
 - L.SP3 x-connect
 - L.SP3 connect
- All advantages at a glance
- Fastening solutions for the automotive industry
- Product overview
- Configurator

FOR COMFORTABLE, PERFECT ACCESS



- ▶ Primary application in the aerospace industry
- ▶ Connected to pistol grip machine or screw driver via axial adapter **L.SP3 x-connect**
- ▶ Output in screw axle
- ▶ Highest accuracy of $\pm 5\%$
- ▶ Sockets interchangeable with holder

AGENDA

- L.SP3 system
 - L.SP3 access
 - L.SP3 access inline
 - L.SP3 access straight
 - L.SP3 touch**
 - L.SP3 angle
 - L.SP3 angle HD
 - L.SP3 angle touch
 - L.SP3 x-connect
 - L.SP3 connect
- All advantages at a glance
- Fastening solutions for the automotive industry
- Product overview
- Configurator

OUTPUT SOCKET GEARS | STANDARD PROFILES



HEX
Hexagon profile



DH
Double hex



AF
Width across flats



BH
Bit-holder



SFD
Surface Drive



DSD
Diagonal S drive



PF
Pathfinder



NH
Nut holder



SD
Square drive



Torx E



Torx TX



IVZ
Triple square profile,
female



AVZ
Triple square
profile, male



2flach
Two-flat



Oktagon
Octagon



DIN 5480
DIN 5480
Plug-in gearing

i We offer you a wide range of output socket gear profiles for various fastening applications.

FLEXIBLE DIRECTION OF ROTATION & DIRECTION OF INSTALLATION



i The rotation direction to be blocked must be set according to the desired **output direction of rotation (right/ left rotating)** and the **direction of installation (upward or downward offset)** of the out-put socket gear.



- ▶ In principle, all output socket gears can be operated in both directions of rotation
- ▶ Uniform housing
- ▶ Installation direction (upward/downward) regardless of design

AGENDA

- L.SP3 system
 - L.SP3 access
 - L.SP3 access inline
 - L.SP3 access straight
 - L.SP3 touch
 - L.SP3 angle**
 - L.SP3 angle HD
 - L.SP3 angle touch
 - L.SP3 x-connect
 - L.SP3 connect
- All advantages at a glance
- Fastening solutions for the automotive industry
- Product overview
- Configurator

MORE COMPACT ANGLE HEADS IN 90° AND 110°

- ▶ Optimised ergonomics due to compact design
- ▶ Reduced installation size thanks to low installation height in conjunction with **L.SP3 angle**
- ▶ Reduced weight thanks to the omission of an adapter
- ▶ Two versions in 90° and 110°
- ▶ Easy maintenance
- ▶ Two transmission ratios as standard available $i = 1.45$ | $i = 2.0$



COMBINATION OF 3 DIFFERENT ADDITIONAL COMPONENTS

- ▶ **Mounting flange** enables additional accessories to be attached (such as a reaction arm) in conjunction with a standard angle head
- ▶ **Reaction bar** offers additional equilibrium of forces as of 60 Nm
- ▶ **Return ring** allows resetting in both rotation directions, only for open design
- ▶ **Indexing** allows you to adjust the angle of a geared offset head / angle head; 360° swivel range; in conjunction with a standalone angle head



i If the optional components like flange or return ring are not desired, the standard angle head can be assembled directly onto the geared offset head.

ANGLE HEADS IN 90° AND 110° DESIGN



90° design



110° design


SELF-CONTAINED, PRECISE AND READY-TO-USE.



- ▶ Compact design
- ▶ Torque transmission with highest accuracy of $\pm 4\%$
- ▶ Highly efficient
- ▶ Two versions in 90° and 110°
- ▶ Two transmission ratios as standard available $i = 1.45$ | $i = 2.0$

i **L.SP3 angle** as a stand-alone tool has the same function as angle heads do as components, except that there is no geared offset head. All that has to be done is to attach conventional sockets.

SELF-CONTAINED, PRECISE AND READY-TO-USE.

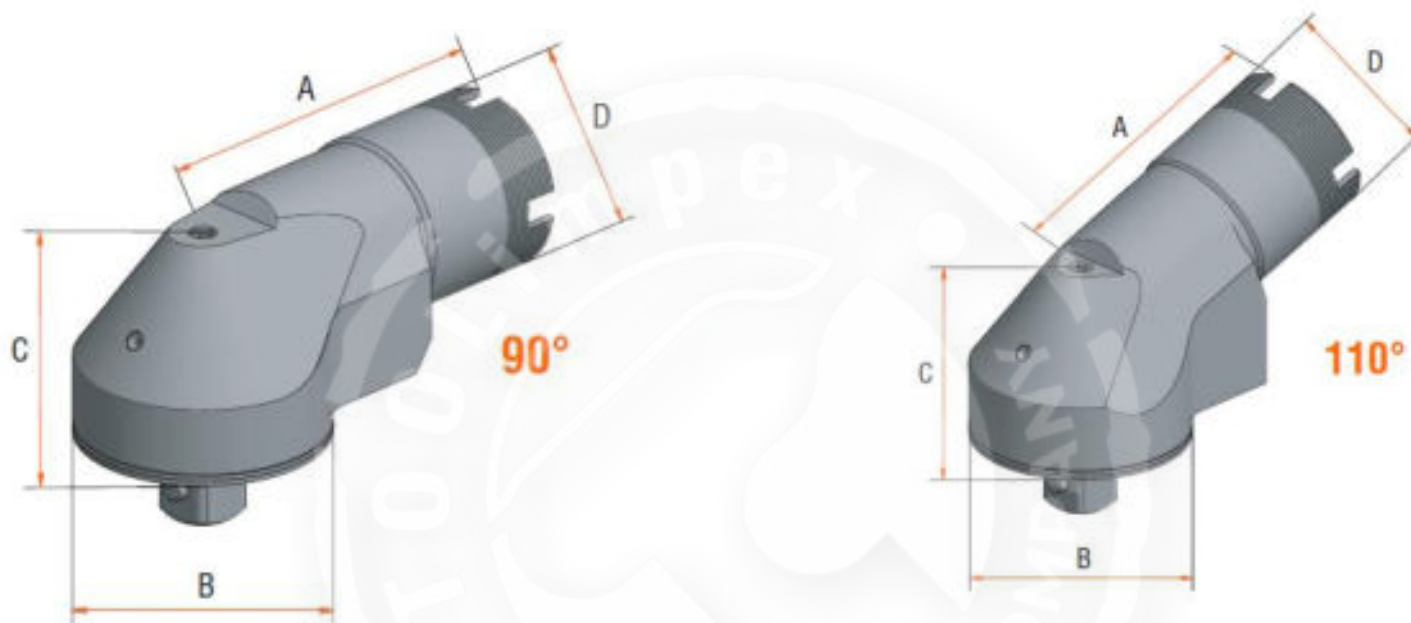

Module	i	12	22	35	55	85	140	190	250
Maximum input torque [Nm]	1,45	9	16	26	41	64	105	143	188
Maximum input torque [Nm]	2,0	6	12	18	29	45	74	100	132
Maximum output torque [Nm]		12	22	35	55	85	140	190	250

i = transmission ratio

AGENDA

- L.SP3 system
 - L.SP3 access
 - L.SP3 access inline
 - L.SP3 access straight
 - L.SP3 touch
 - L.SP3 angle
 - L.SP3 angle HD**
 - L.SP3 angle touch
 - L.SP3 x-connect
 - L.SP3 connect
- All advantages at a glance
- Fastening solutions for the automotive industry
- Product overview
- Configurator


ANGLE HEAD WITH A HOLD AND DRIVE FUNCTION



- ▶ Compact design
- ▶ Installing various holders and sockets
- ▶ Torque transmission with highest accuracy level of $\pm 4\%$
- ▶ Transmission ratio $i = 2.0$

L.SP3 angle HD is an angle head with a hollow polygon shaft that accommodates various holder systems. This angle head comes with an outer hexagon that can take different nuts.

SELF-CONTAINED, PRECISE AND READY-TO-USE.

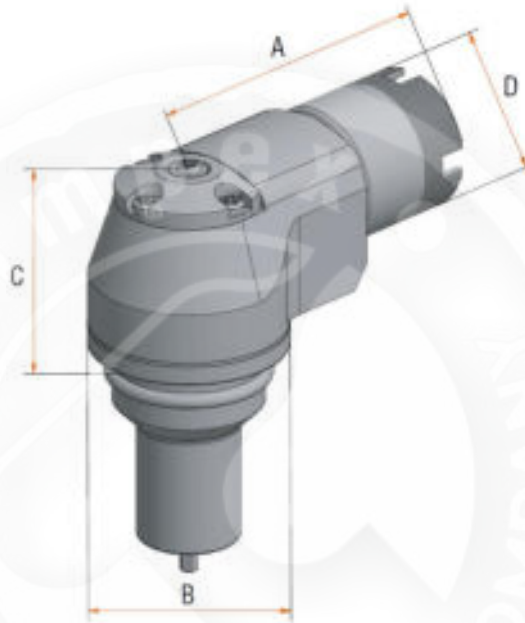

Module	i	12	22	35	55	85	140	190	250
Maximum input torque [Nm]	2,0	-	12	18	29	45	74	100	132
Maximum output torque [Nm]		-	22	35	55	85	140	190	250

i = transmission ratio

AGENDA

- L.SP3 system
 - L.SP3 access
 - L.SP3 access inline
 - L.SP3 access straight
 - L.SP3 touch
 - L.SP3 angle
 - L.SP3 angle HD
 - L.SP3 angle touch**
 - L.SP3 x-connect
 - L.SP3 connect
- All advantages at a glance
- Fastening solutions for the automotive industry
- Product overview
- Configurator

SPECIAL FEATURES



bit holder profiles

locking ring, cap nut or quick-change

flush sockets

sockets with flush or protruding end,
available with various output profiles and profile depths

L.SP3 angle touch is a bit holding system you can master every eventuality with: It's perfectly combinable and interchangeable.

AGENDA

- L.SP3 system
 - L.SP3 access
 - L.SP3 access inline
 - L.SP3 access straight
 - L.SP3 touch
 - L.SP3 angle
 - L.SP3 angle HD
 - L.SP3 angle touch
 - L.SP3 x-connect**
 - L.SP3 connect
- All advantages at a glance
- Fastening solutions for the automotive industry
- Product overview
- Configurator

AXIAL-ADAPTER FOR CONNECTION TO A DRIVE UNIT



- ▶ Connection of a wide range of drive units
- ▶ Compact design guarantees low weight
- ▶ Fast and simple tool changing

i Optionally available: **L.SP3 x-connect with integrated planetary gearbox** transfers the desired torque with a transmission ratio > 1 .

AGENDA

- **L.SP3 system**
 - L.SP3 access
 - L.SP3 access inline
 - L.SP3 access straight
 - L.SP3 touch
 - L.SP3 angle
 - L.SP3 angle HD
 - L.SP3 angle touch
 - L.SP3 x-connect
 - L.SP3 connect**
- All advantages at a glance
- Fastening solutions for the automotive industry
- Product overview
- Configurator

ADAPTER FOR DRIVE UNIT WITH ANGLE HEAD



- ▶ Standardised adapter interfaces
- ▶ Screw, clamp or welding adapters can be used depending on angle head design

i Take advantage of the benefits of **L.SP3 connect** and maximize your tools' overall performance.

AGENDA

- L.SP3 system
 - L.SP3 access
 - L.SP3 access inline
 - L.SP3 access straight
 - L.SP3 touch
 - L.SP3 connect
 - L.SP3 angle
 - L.SP3 angle HD
 - L.SP3 angle touch
 - L.SP3 x-connect
 - L.SP3 connect
- **All advantages at a glance**
- Fastening solutions for the automotive industry
- Product overview
- Configurator

THE NEW GENERATION OF OFFSET HEADS
ALL ADVANTAGES AT A GLANCE



- ▶ Process reliability through **higher levels of accuracy**
- ▶ **Large standard programme** up to 250 Nm
- ▶ Small and **compact** design
- ▶ **Optimised ergonomics**
- ▶ Flexibility through **wide range of variations**
- ▶ **Easy maintenance**
- ▶ **Long product life cycle**
- ▶ High **availability**




reddot award 2015
honourable mention

AGENDA

- L.SP3 system
 - L.SP3 access
 - L.SP3 access inline
 - L.SP3 access straight
 - L.SP3 touch
 - L.SP3 connect
 - L.SP3 angle
 - L.SP3 angle HD
 - L.SP3 angle touch
 - L.SP3 x-connect
 - L.SP3 connect
- All advantages at a glance
- **Fastening solutions for the automotive industry**
- Product overview
- Configurator

OUR FASTENING SOLUTIONS FOR THE AUTOMOTIVE INDUSTRY

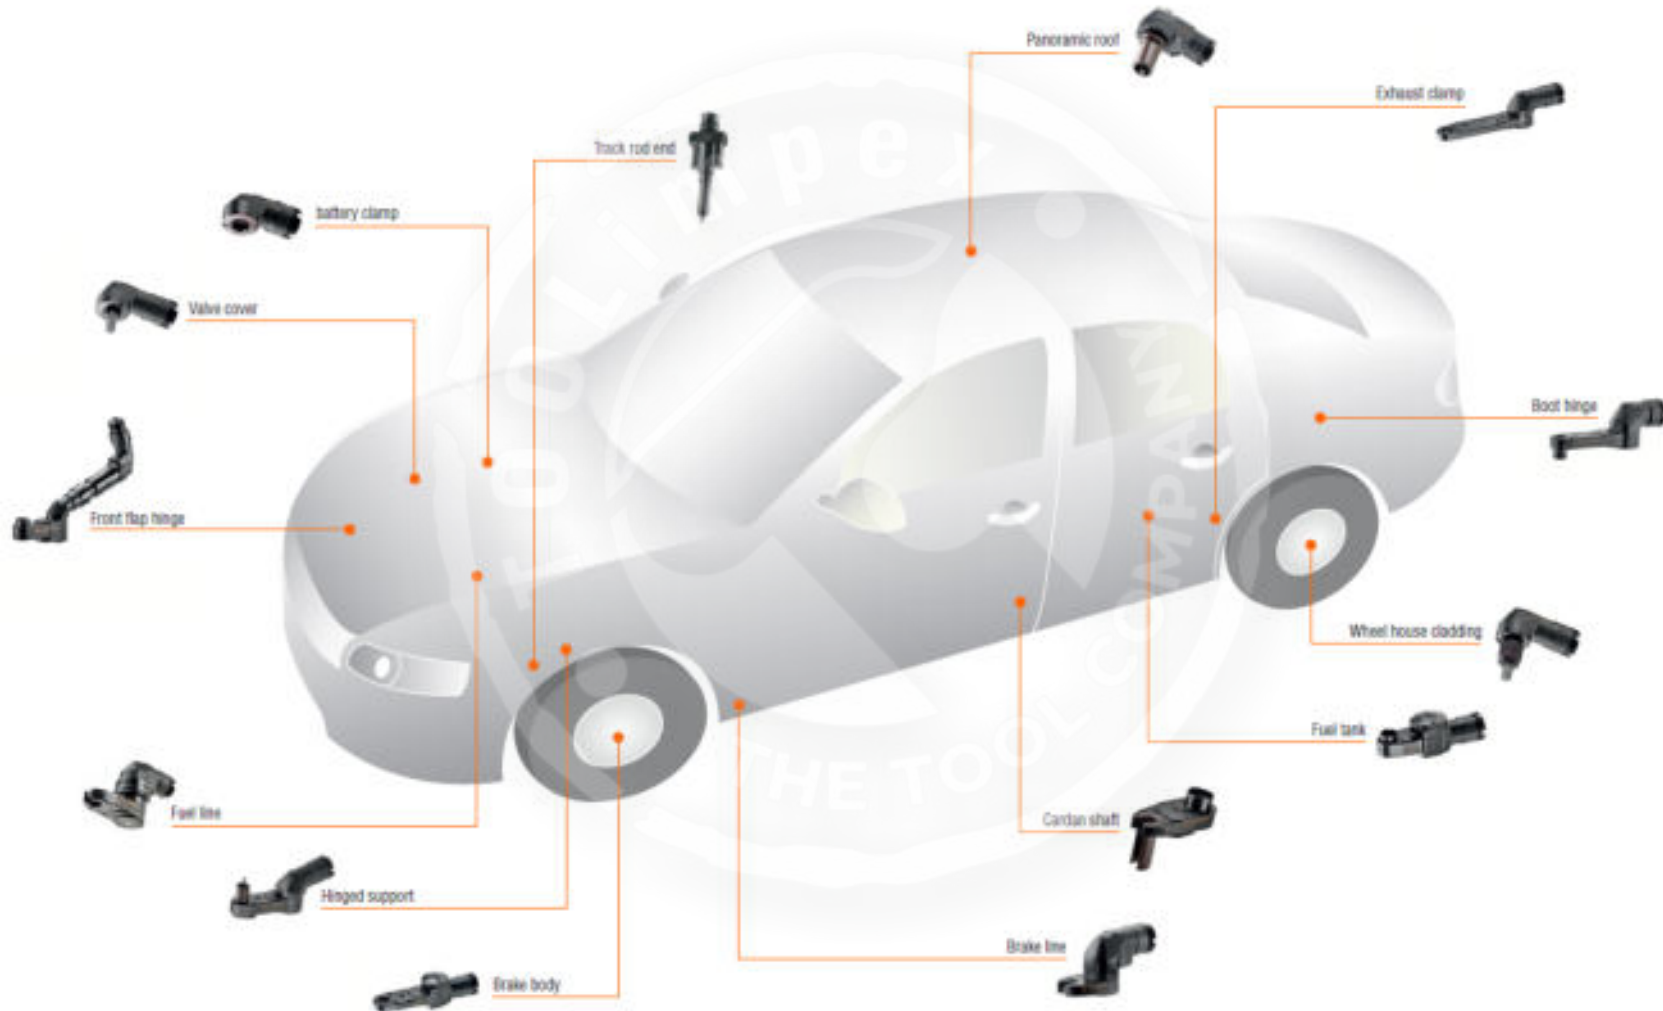


AGENDA


- L.SP3 system
 - L.SP3 access
 - L.SP3 access inline
 - L.SP3 access straight
 - L.SP3 touch
 - L.SP3 connect
 - L.SP3 angle
 - L.SP3 angle HD
 - L.SP3 angle touch
 - L.SP3 x-connect
 - L.SP3 connect
- All advantages at a glance
- Fastening solutions for the automotive industry
- **Product overview**
- Configurator

LSP3 PRODUCT OVERVIEW




 Gas pipe controller




 Engine high-pressure pump



 Seat assembly




 Fastening at robot applications




 Gearbox fastening




 Wing assembly



 Turbocharger fastening



 Circuit board assembly



AGENDA

- L.SP3 system
 - L.SP3 access
 - L.SP3 access inline
 - L.SP3 access straight
 - L.SP3 touch
 - L.SP3 connect
 - L.SP3 angle
 - L.SP3 angle HD
 - L.SP3 angle touch
 - L.SP3 x-connect
 - L.SP3 connect
- All advantages at a glance
- Fastening solutions for the automotive industry
- Product overview
- **Configurator**

LSP3 CONFIGURATOR



- + Entire fastening system configurable:
 - from socket gears to drive machines from many manufacturers
- + Available online on mobile devices
- + Own login account
- + Save configurations and call them up at any time
- + Send requests directly from the configurator
- + Easy handling



Please send your configuration directly from the configurator and so request an offer for your fastening system.

*luebbering.de/configurator

L.SP3 PROJECTING SET

LSMR



L.SP3 PROJECTING SET

- + Simple and fast feasibility study
- + Ensures a correct product choice
- + Realistic demonstration of the product portfolio
- + Modular product series **L.SP3**
- + Different sets for different torque areas



L.SP3 Projecting Set – Maximum confidence in choosing the right product through easy feasibility studies.

VARI
GRIP



- ⊕ Variable positions enable several tools to be held in a userfriendly way
- ⊕ Your tool is always next to you
- ⊕ Easily adjustable for all common fasteners
- ⊕ Scratching protection through vulcanized surface
- ⊕ Secure hold



L.VARIGRIP – have your fastening tool always handy with the flexible tool holder of LÜBBERING.

- ✚ conspicuous colour marking in manufacturing and quality control
- ✚ Optimum and easy marking
- ✚ Fast installation and comfortable control
- ✚ High application safety
- ✚ No maintenance work



L.SICOPoint – The professional marking system for conspicuous colour markings.

Johannes Lübbering GmbH
Industriestraße 4
33442 Herzebrock-Clarholz | Germany

Fon: +49 (52 45) 83 09 – 0
Fax: +49 (52 45) 83 09 – 250

info@luebbering.de | www.luebbering.de