### With Quicher, it is easy to rearrange the production line to meet the change of screw diameter and form. It also helps you to improve the quality control and productivity.

Quicher, the automatic screw feeder, accelerates the speed of screw tightening job faster than handwork. We now made it possible to tighten the special and difference sizes of screws with one machine by introducing a unique replaceable rail system (the first in the world). When you have to change the size of screw for the different screw tightening job, what you have to do is just replace the rail.

You need not to change the size of screw for the different screw tightening job, what you have to do is just replace the rail. You need not to change the screw feeder itself. It also helps you to reduce the facility investment cost. The horizontal screw carrying system made it possible to feed screw smoother and faster than other conventional feeders. Quicher, with its versatility and high work efficiency, helps you to improve your screw tightening job.



The horizontal screw carrying

forward horizontally by vibration of the motor.

Rail (Hor

second and help you to increase the productivity.

system ensures stable screw feeding.

Unlike the vertical screw carrying by gravity, the screws are ca

Principle explanation figure for Quicher

With this screw carrying method, the screw clogging is eliminate

Because of horizontal, it is hard to pile or choke with screws.

It feeds two screws every one second

Compared to the manual operation, you can expect the tightening job three to five times faster. Ouicher can feed two screws every one

### The standard screwdriver bits

#### on the market can be used.

The screwdriver does not require any special bit. You can use the standard bit on the market. To pick up the screw with bit, descend the magnetized bit vertically along the Vshaped groove of the bit guide, clutch the bit to the screw head, and pull it toward you. It copes with suction type.



### It takes only five seconds to replace the rail.

With an Allen wrench, you can replace the rail within five seconds. Loosen the screw fixing the rail and replace the rail. Adjust the position of the rail and tiehten it with the fixing screw.



### Other features


- \* It is easy to handle and takes only about 10 minutes to learn operation.
- \* It is easy to supplement screws. Just fill up hopper.
- \* If screws are overloaded or clogged, power source will be automatically cut off.



direction

### It also copes with the one with washer and special screws, too.

Because of the horizontal screw carrying system, it also copes with the screws like the short neck length and the screws assembled with washer



assembled with washer's flow smoothly.

### Just replace the rail to change screw size.

Quicher is suitable to use various screws just by replacing the rail containing respective screw size. For the NSB series, eight different rails are available.



With NEJIKURA installed, large amount screws can be stocked. (Plus 500 ml to 800 ml) angle

### **Outline Figure**


# Quicher NJR Type 238.6 Standby part of screw (in case of 3 NEJIKURA NJ-80 With screw jump-ou NEJIKURA T-510NJ 10.9 101.4

Note: For your safety, be sure to read this instruction manual thoroughly before you operate this machine.



\* The specifications and appearance may be changed without prior notice to improve quality of machine.

### Manufacture: OHTAKE / ROOT KOGYO CO.,LTD 27 KANEGASAKI HAGISHO ICHINOSEKI IWATE JAPAN

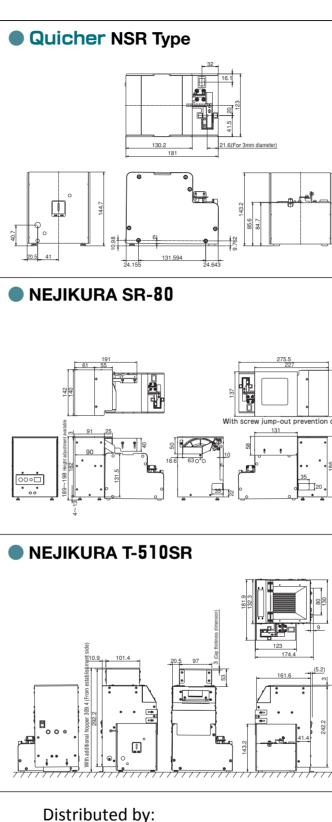


Janome Sewing Machine Co., Ltd. 1463 Hazama-machi, Hachioji-shi Tokyo, Japan 193-0041 Tel: +81-42-661-6301 Fax: +81-42-661-6302 E-mail: j-industry@gm.janome.co.jp http://www.janome.co.jp/industrial.html

## Quicher Precision Screw Feeder



Quicher alone can cope with various types of screws. Automatic screw feeder with the world's first replaceable rail.

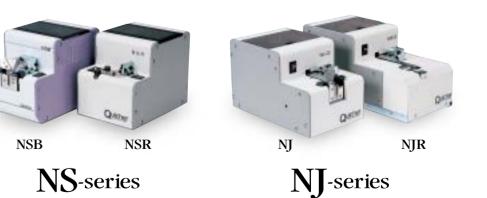




With Quicher, it is easy to rearrange the production line to meet the change of screw diameter and form. It also helps you to improve the quality control and productivity.

### Quiche Precision Screw Feeder

### **NS-series**

### Introducing new bit guide

This new bit guide leads the screwdriver bit to the center of the screw head. It will improve productivity. With a sliding adjuster, the bit size can be changed.



### It carries screws smoothly. Increased durability and long life is assured.

### (Modification on screw feeding section)

The load on the motor is decreased and efficiency of the screw alignment is increased.

### (Adjustment of rail angle)

The tilting angle of the rail is adjustable according to the screw size to be used.

### (Adjustment of amplitude)

The amplitude is adjustable to suit the screw size to be used.

#### $\langle Without rolling \rangle$

The rolling of the rail is eliminated and the screws are carried smoothly.

### One Quicher can cope with eight different sizes of screws.



The NS series cope with eight different sizes of screws just by replacing the rail (8 sizes from M1.0 to M3.0) Optional parts



\*\* The standard screwdriver bits and suction types can be used \*\* It copes with special screws (SW, PW and short neck length).

### Other capabilities

It is compact and space saving. With installation of Nejikura, the large stock of screws can be loaded. It is equipped with an overload backstop protection circuit.



### Easy to replace rail

#### NSB

It is easy to replace the rail to meet the change of screws.

Exchange of NSB rail



is attached to the screw

Example of NSR and Robot



Quicher

Precision Screw Feeder

### **NJ**-series

### NJ TYPE

### NJ type







Picking up screws



Applicable screw size: Applicable screw length From M1.4 to M5.0 (under head) : Up to 18mm

Scooping chamber capacity: 150cc With protection and recovery circuit % It copes with special screws (SW, PW, and short neck length etc)









NJR installed with Robot Setting screws Picking up Screws

NJ series			
Model Name & Number	N J	NJR	
Size	130(W)×215(D)×136(H)	130(W)×275(D)×136(H)	
Weight (including rail)	Approx. 3.2 Kg	Approx. 4.2 Kg	
Power Source	AC 100V, DC 12V 500mA , AC adapter		
Protection & Recovery Circuit	Motor overload stop. Protection circuit for reverse power connection		
Applicable Screw	NJ and NJR series (Refer right table for applicable screws & rail for NJ series)		
Applicable Screw Length (under head)	Up to 18mm		
Scooping Chamber Capacity	Approx. 150 cc		
Accessories (in package)	Instruction Manual	Instruction manual	
	Allen Wrench (L shaped, 2mm)	Allen Wrench (L shaped, 2mm)	
	AC adapter	AC adapter	




### Quicher


NSR Applicable screw size: from M1.0 to M3.0 Scooping chamber capacity: 80cc

NSB

Approx. 3.01 Kg

\* It copes with special screws (SW, PW and short neck length etc)





#### NS series Model Name & Numbe NSE 123(W)×181(D)×145(H) 123(W)×181(D)×145(H) Weight (including rail) Approx. 2.92 Kg

Power Source	AC 100V, DC 12V 500mA , AC adapter		
Protection & Recovery Circuit	Motor overload stop. Protection circuit for reverse power connection		
Applicable Screw	From M1.0 to M3.0 (Refer right table for applicable rails)		
Applicable Screw Length (under head)	Up to 20mm		
Scooping Chamber Capacity	80 cc		
Accessories (in package)	Instruction Manual Allen Wrench (L shaped, 2mm) AC adapter Passage Window (each of two types) 0.35mm Gauge Plate (to adjust holding plate)	Instruction Manual Allen Wrench (L shaped, 2mm) AC adapter Passage Window (each of two types)	

### NSB series

Screw Nominal Size M1.0 M1.2 M1.4 M1.7 M2.0 M2.3 M2.6 M3.0 Applicable Rail SR10 SR12 SR14 SR14 SR17 SR20 SR23 SR30

#### NSR series

Screw Nominal Size M1.0 M1.2 M1.4 M1.7 M2.0 M2.3 M2.6 M3.0 Applicable Rail SRR10 SRR12 SRR14 SRR17 SRR20 SRR23 SRR26 SRR30

When you place an order, please specify the type number of the applicable rail. One Escaper comes with the rail. NS series can cope with the screw size from M1.0 to M3.0

### The standard screwdriver bits on the market can be used.

• The suction type screwdriver.

• The bit type screwdriver.

### Capable of loading large stock of screws

Up to 150cc screws can be loaded.

### Copes with special screws

The screw assembled with washer or SW can also be coped. It handles the screw sizes of up to M5.0. It is equipped with an overload reverse protection circuit.

### The rail is replaceable.

It copes with the various sizes of screws. Model NI-23 handles four sizes of screws. <sup>∗</sup> Refer table 1

#### (Angle adjustment of rail)

Optional Parts

The angle of inclination degree adjustment of the rail is possible by the kind of screws.



Holding plate

### By connecting with Nejikura, long period of time operation is available.

With a hopper installed, unmanned operation for the long period is available.

### Smooth screw feeding

The screws can be supplied without failing to keep up the robot's operation. It is equipped with an overload reverse protection circuit. A screw existence signal is attached to the screw pick out section.

**Optional Parts** 



Passing plate/ Escaper/ Rail

Туре	Screw Nominal Size	Applicable Rail		Туре	Screw Nominal Size	Applicable
NJ-12	1.4mm	R-14		NJR-12	1.4mm	RR-14
	1.7mm	R-17			1.7mm	RR-17
NJ-23	2.0mm	R-20		NJR-23	2.0mm	RR-20
	2.3mm	R-23			2.3mm	RR-23
	2.6mm	R-26			2.6mm	RR-26
	3.0mm	R-30			3.0mm	RR-30
NJ-45	3.5mm	R-35		NJR-45	3.5mm	RR-35
	4.0mm	R-40			4.0mm	RR-40
	5.0mm	R-50			5.0mm	RR-50
When you place an order, please specify One Escaper comes with the rail.						

the type number of the applicable rail.

### **NEJIKURA**

Precision Screw Hopper



Numbers of screws that 800cc hopper can take: M2.3x5: approx. 20,000 pieces M3.0x6: approx. 5,600 pieces

Floor Type pplicable screw size: Applicable screw length from M2.0 to M5.0 (under head): up to 15mm With pper capacity: With 800cc Quicher cover

### Available combinations of Quicher and NEJIKURA

NEJIKURA Type	Quicher
NJ-80	NJ/NJR
SR-80	NSB/NSR



Numbers of screws that 400cc hopper can take: M2.3x5: approx. 10,000 pieces M3.0x6: approx. 2,800 pieces

ower 1	Гуре
plicable screw size: om M1.0 to M5.0	Applicable screw le (under head)
Hopper capacity:	T-510S → 20 T-510J → 18

Additional hopper capacity: 400cc

Continuous operation with Quicher

Because NEJIKURA supply a proper quantity of screws continuously, it minimize the load to Quicher and save its life.

### NEJIKURA floor type (SR-80, NJ-80)

- It is easy to install. Just place it beside Quicher.
- It is small and space saving, but takes up to 800cc of screw stock.
- It requires no vertical space.

A sensor detects the amount of screws in Quicher and NEJIKURA supplies optimum amount of screws automatically. The working time of the rotor (impeller) can be adjusted by a timer.





With screw jump-out prevention cover (Accessories)

Example of setting (Figure without cover)

### NEJIKURA tower type (T-510)

- It is easy to install. Just place it on Quicher.
- It saves the floor space. The amount of stock can be increased in the height direction.
- A sensor detects the amount of screw in Quicher. It is the labor saving.

A sensor detects the amount of screws in Quicher and NEJIKURA supplies optimum amount of screws automatically. The tact time of the belt conveyor can be adjusted by a timer.

### Available combinations of Quicher and NEJIKURA

NEJIKURA Type	Quicher
T-510S	NSB/NSR
T-510J	NJ/NJR



Setting example: Quicher, T-510 and additional hopper.

Model Name & Number	Floor Type NJ-80, SR-80	Tower Type T-510	
Size (*1)	NJ-80: 142(W)x191(D)x188(H)	130(W) x 171(D) x 245(H)	
	SR-80: 142(W)x191(D)x189-198(H)	With additional hopper: 295(H)	
Weight (excluding AC adapter)	Approx. 2.9 Kg	Approx. 3.1 Kg	
Power Source	AC 100V, DC 12V 500mA, AC adapter		
Screw Feeding Amount	Variable Type		
Applicable Screw	M2.0 to M3.0 M1.0 to M5.0		
Screw Feeding Sensor	Photometry		
Hopper Capacity (*2)	Approx. 800 cc	Standard hopper: Approx. 400cc / Additional Hopper: 400 cc	
Accessories (in package)	Instruction Manual	uction Manual Instruction Manual	
	AC Adapter	Signal Cable AC Adapter	

(\*1) The height of SR-80 is adjustable in the range of 189 to 198(H)mm (\*2) 400cc: M2.3 x 5/approx. 10,000 pieces M3.0 x 6/approx. 2,800 pieces 800cc: M2.3 x 5/approx. 20.000 pieces M3.0 x 6/approx. 5.600 pieces

NEJIKURA series	