

Cleco

Tame the Line

Torque Wrenches



TOOLimpex
CZECH REPUBLIC s.r.o.

Cleco Torque Wrenches provide repeatable accuracy for tough applications

Regardless of industry, when there is a requirement for accurate torque application, Cleco® has the right tool for the job. From safety to quality-critical applications, Cleco industrial torque wrenches are the product for your specific application and are compliant with global fastening standards.

PRESET MECHANICAL TORQUE WRENCH

Cleco preset mechanical torque wrenches deliver exceptional torque accuracy (+/- 4%), with up to 100,000 cycles between calibration for lasting reliability and cost savings. Seamlessly fitting industry standards (9x12, 14x18), they guarantee versatility without modifications. The 120XP ball lock ratchet head ensures a tight 3° swing arc, maximizing productivity in tight spaces. Trust in accuracy, durability, and unmatched convenience – all in one powerful tool.

Accurate

Torque accuracy of +/- 4% CW* delivering precise control to your safety and quality-critical tightening applications.

Durable


Designed and tested for 100K cycles before recertification providing exceptional durability and reliability.

Versatile

Industry standard interchange sizes (9x12 and 14x18) that easily integrate into your existing workflow.

Accessibility

Supplied with a 120XP ball lock ratchet head boasting a minimal 3° swing arc making it ideal in tight spaces.

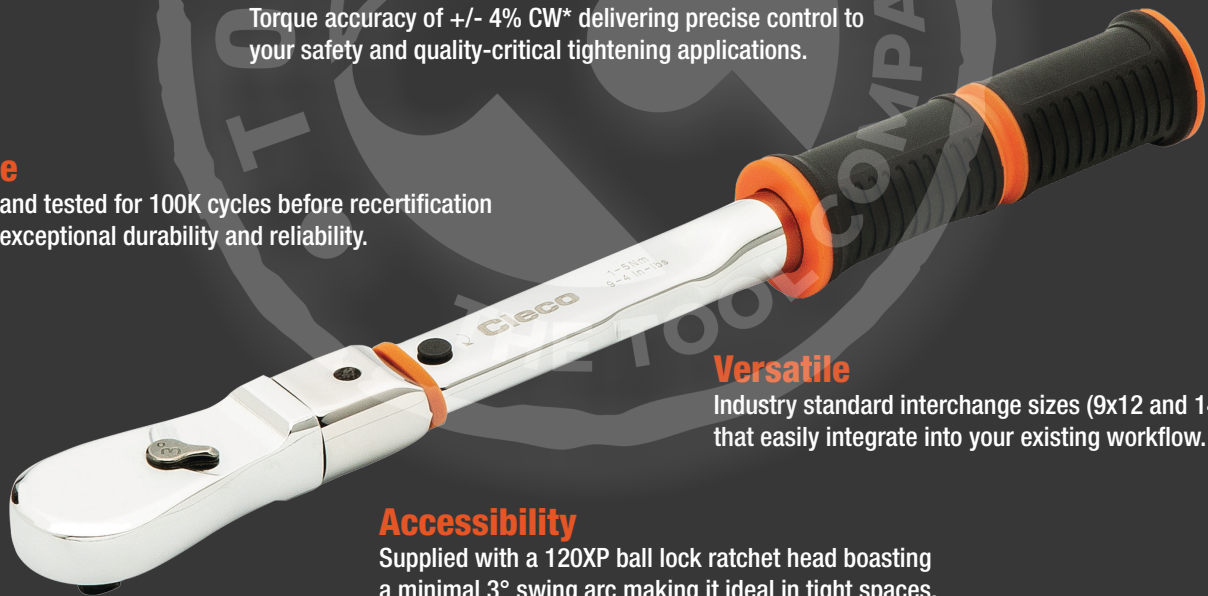

Conforms with ASME B107.300-2022 standards and specifications.

BASIC ELECTRONIC TORQUE WRENCH

Cleco electronic torque wrenches offer 10 preset torque settings and 3 function modes, ensuring ease of use, flexibility, and accuracy through a digital readout and operator feedback.

Flexible

3 function modes feature peak torque, angle and peak angle for flexibility in a variety of tightening applications.

Accurate

Torque accuracy of +/- 3% CW* delivering precise control to your safety and quality-critical tightening applications.

Easy to Use

10 available preset torque settings for quick access to frequently-repeated applications.

Operator Feedback

Digitally tracks torque and angle measurements. Vibrating handle, buzzer and LCD screen alert the operator when target torque is reached.

**Torque accuracy stated is in upper 80% of wrench capacity*



ADVANCED ELECTRONIC TORQUE WRENCH

With password protection for tamper-proof operation, and ergonomics built into the feedback capabilities, Cleco advanced electronic torque wrenches are designed specifically for secure production environments where a high level of durability, accuracy, precision and comfort are required.

Accurate

Torque accuracy of +/-1.5% CW and +/-2.5% CCW angle settings offer +/-1% reading of angle accuracy delivering precise control to your safety and quality-critical tightening applications.

Connectivity

USB connections with PC software interface.

Durable


Increase uptime with 100K cycle between calibration.

Operator Feedback

Vibrating handle, buzzer and LCD screen alert the operator when target torque is reached.

Secure

Safeguard your assembly process by password-protecting each rundown operation, granting operators up to 100 preset operations for maximum flexibility while maintaining strict control over torque settings.

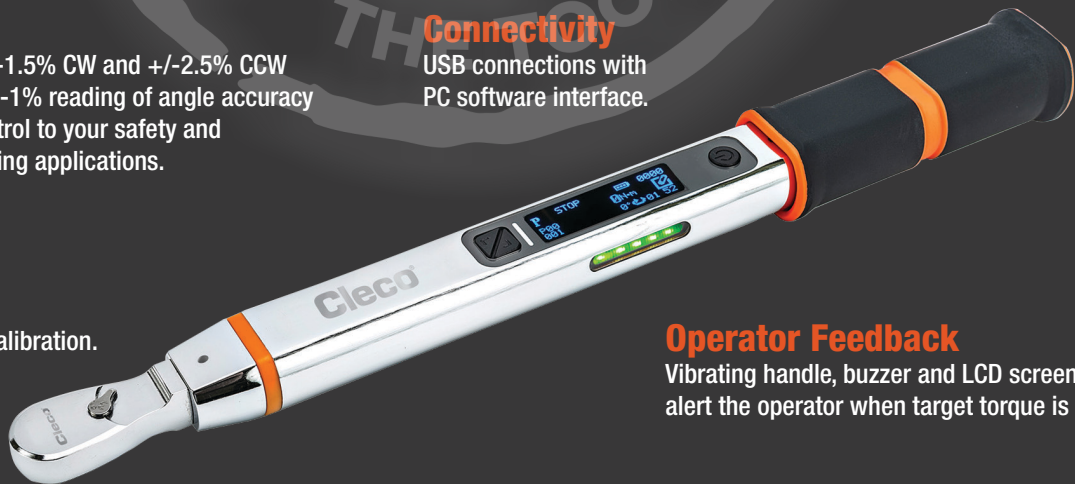

**Conforms with ISO 6789 and ASME B107.300-2022 standards and specifications.*

Cleco Torque Wrenches

SP-1106-EN | 0324 | Specifications subject to change without notice. | Cleco® is a registered trademark of Apex Brands, Inc. | © 2024

BASIC ELECTRONIC TORQUE WRENCH



Model Number	Model Description	Torque Range				Head Type	Output Drive	Length mm (in)	Weight kg (lb)
		Nm		Ft-lb					
		Min	Max	Min	Max				
ETWB27FR	Basic ETW 1/4" Dr. 2.7-27 Nm	2.7	27	2	20	Fixed	1/4"	392 (15.55)	0.68 (1.5)
ETWB135FR	Basic ETW 3/8" Dr. 13.5-135 Nm	13.5	135	10	100	Fixed	3/8"	406 (16)	0.8 (1.8)
ETWB340FR	Basic ETW 1/2" Dr. 34-340 Nm	34	340	25	250	Fixed	1/2"	624 (24.3)	1.3 (2.9)

ADVANCED ELECTRONIC TORQUE WRENCH



Model Number	Model Description	Torque Range				Head Type	Output Drive	Length mm (in)	Weight kg (lb)
		Nm		Ft-lb					
		Min	Max	Min	Max				
ETWA25IC	Advanced ETW 1/4 Dr. 5-25 Nm Interchg. Head	5	25	4	18	Interchangeable	1/4"	381 (15)	1.22 (2.7)
ETWA27IC	Advanced ETW 3/8 Dr. 1.4 - 27.2 Nm Interchg. Head	1.4	27.2	1	21	Interchangeable	3/8"	381 (15)	1.3 (2.9)
ETWA100IC	Advanced ETW 3/8 Dr. 20-100 Nm Interchg. Head	20	100	15	74	Interchangeable	3/8"	381 (15)	1.3 (2.9)
ETWA340IC	Advanced ETW 1/2 Dr. 68-340 Nm Interchg. Head	68	340	50	250	Interchangeable	1/2"	736 (29)	2.3 (5.06)

Includes: Advanced ETW, fixed head, flex head, Dual Charging stand, USB-A to USB-C cable for charging (USB-A 5V supply required for charging is NOT included)/data transfer, 2 x Li-ION battery pack, USB drive with e-spec software, screwdriver.

PRESET MECHANICAL TORQUE WRENCH



Model Number	Model Description	Torque Range						Head Type	Interchange Size	Length without Head		Weight without Head	
		Nm		in-lb		ft-lb				mm	in	kg	lb
		Min	Max	Min	Max	Min	Max						
PTW05IC	1/4 PRESET INTERCHG TW 1-5	1	5	9	44			Interchangeable	9 x 12	177	7.0	0.16	0.36
PTW25IC	3/8 PRESET INTERCHG TW 5-25	5	25	44	221			Interchangeable	9 x 12	231	9.1	0.47	1.04
PTW50IC	3/8 PRESET INTERCHG TW 10-50	10	50			7	37	Interchangeable	9 x 12	231	9.1	0.47	1.04
PTW100IC	1/2 PRESET INTERCHG TW 20-100	20	100			15	74	Interchangeable	14 x 18	310	12.2	0.82	1.80
PTW200IC	1/2 PRESET INTERCHG TW 40-200	40	200			30	148	Interchangeable	14 x 18	422.5	16.6	1.07	2.35

Includes: 120XP Ratcheting Head

REPLACEMENT HEADS FOR ETWA/PTW



Model Number	Model Description
T50-3102057	120XP RATCHETING HEAD 1/4DR 9X12
T50-3102058	120XP RATCHETING HEAD 3/8DR 9X12
T50-3102059	120XP RATCHETING HEAD 1/2DR 14X8
T50-3102060	120XP FLEX RATCHETING HEAD 1/4DR 9X12
T50-3102061	120XP FLEX RATCHETING HEAD 3/8DR 9X12
T50-3102063	120XP FLEX RATCHETING HEAD 1/2DR 14X18

REPLACEMENT PARTS FOR ETWA

Model Number	Model Description
T50-1102184	REP LI BATTERY FOR E-SPEC TW CLECO
T50-1102185	REP CHRГ STAND FOR E-SPEC TW CLECO
T50-1102186	REP USB STICK FOR E-SPEC TW CLECO
T50-1102187	REP GRIP FOR E-SPEC TW CLECO

TORQUE ANALYZER



Model Number	Model Description
CTA0414	0.4-4 Nm CLECO TORQUE ANALYZER
CTA3038	3.0-30 Nm CLECO TORQUE ANALYZER
CST6838	68 Nm STATIONAIRY TRANSDUCER (For use on CTA0414 or CTA3038)
CJK38	DYNAMIC JOINT KIT FOR USE WITH 68NM STATIONARY TRANSDUCER