

Cordless screwdrivers

Standard-Tools PSXBW / HSXBW

- Works with an external Controller like SMXBT



Standalone PSXSBW / HSXSBW

- Works with a integrated Controller
- Additional system display



Standard-Tools

Tools: PSXBW / HSXBW

- Works together with an external AMT controller
- No system display

Master PC



SMXBT +
Software

AMT *Ablauf*




Accesspoint



- Angle nutrunner
- Pistol-Grip nutrunner

Standalone-Tools

Tools: PSXSBW / HSXSBW

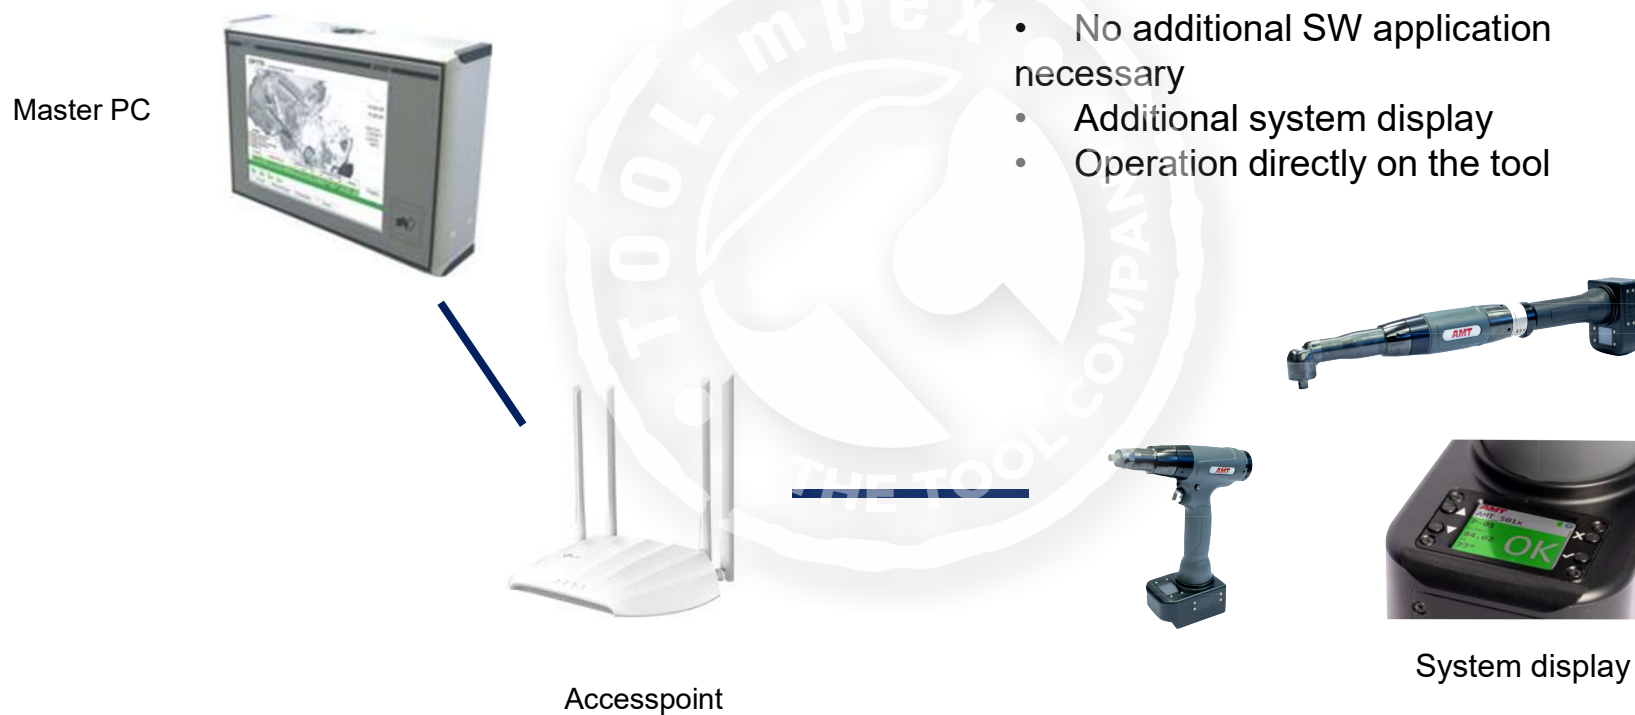

- Controller integrated in the tool
- Direct connection to the control system
- No additional SW application necessary
- Additional system display
- Operation directly on the tool

- Angle nutrunner
- Pistol-Grip nutrunner

Torque ranges Pistolen grip tool PSXBW / PSXSBW

PSXBW



2 Nm – 21 Nm

Name	Ident.-no.	Torque	Speed 1/min	Weight
PSXBW1006ZV38	70206215	2 – 6 Nm	621	1,40 kg
PSXBW1015ZV38	70206200	3 – 15 Nm	621	1,30 kg
PSXBW1021ZV38	70206201	5 – 21 Nm	476	1,30 kg
PSXBW1006ZH14	70206216	2 – 6 Nm	621	1,40 kg
PSXBW1015ZH14	70206202	3 – 15 Nm	621	1,30 kg

PSXSBW



Name	Ident.-no.	Torque	Speed 1/min	Weight
PSXSBW1006ZV38	70252788	2 – 6 Nm	621	1,40 kg
PSXSBW1015ZV38	70252790	3 – 15 Nm	621	1,40 kg
PSXSBW1021ZV38	70252791	5 – 21 Nm	476	1,40 kg
PSXSBW1006ZH14	70252789	2 – 6 Nm	621	1,40 kg
PSXSBW1015ZH14	70252792	3 - 15 Nm	621	1,40 kg

Torque ranges hand hold ngle nutrunner HSXBW/HSXSBW

4 Nm – 95 Nm

HSXBW



Name	Ident.-no.	Torque	Speed 1/min	Weight (kg)
HSXBW1015WV14	70122784	4 – 15 Nm	592 rpm	1,7
HSXBW1025WV38	70122785	7 - 25	366	1,8
HSXBW1039WV38	70122786	10 - 39	242	1,9
HSXBW1050WV38	70122787	13 - 50	185	2,1
HSXBW1064WV38	70122788	16 - 64	138	2,1
HSXBW1095WV12	70122789	24 - 95	94	2,7

HSXSBW



Name	Ident.-no.	Torque	Speed 1/min	Weight (kg)
HSXSBW1015WV14	70248921	4 - 15	592	1,9
HSXSBW1025WV38	70248922	7 - 25	366	1,9
HSXSBW1039WV38	70248923	10 - 39	242	2,0
HSXSBW1050WV38	70248924	13 - 50	185	2,2
HSXSBW1064WV38	70248925	16 - 64	138	2,2
HSXSBW1095WV12	70248926	24 - 95	94	2,8



3 Nm – 27 Nm

HSXSBW




Name	Ident.-no.	Torque	Speed 1/min	Weight (kg)
HSXSBW1013ZV38	70248916	3 - 13	753	1,8
HSXSBW1027ZV38	70248917	6 - 27	364	1,8
HSXSBW1013ZF50	70248918	3 - 13	753	1,8
HSXSBW1027ZF50	70248919	6 - 27	364	1,8

Components



Buffer battery

- To maintain the WLAN connection
- The backup battery maintains the



Gyroflex

- Angle compensation
- The tools can be equipped with Gyroflex modules
- Id: GF

Attached scanner/display component

- Scanner for identifying workpieces
- Display to show screwdriving values

Screw point lighting

- Illuminating poorly visible screw positions

Location tags

- Locating tag to identify workpieces
- Agilion, Ubisense, Natev (AC), Kinexon

System display



System display- function menu

- Production menu
- Worker menu
- Maintenance menu

Battery tools

PSXBW/HSXBW

Pistol grip-/Hand held angle Battery/Wifi tools



SMXBT



PSXSBW/HSXSBW

Hand held **Standalone** tools

